

The study of the biomass pyrolysis kinetics and volatile product characteristics influencing on slagging basing on the TG-DTG-FTIR technology

Hongliang Zhang

Guangdong Power Grid Ltd. Electric Power Research Institute, Guangdong Guangzhou, 510600, China

gzmeihualu@163.com

Keywords: biomass; TG; DTG; FTIR; slagging

Abstract. Research the pyrolysis kinetics of eucalyptus and the absorption band and characteristic peaks of volatile products under the heating rate $10^{\circ}\text{C}\cdot\text{min}^{-1}$, $30^{\circ}\text{C}\cdot\text{min}^{-1}$, $60^{\circ}\text{C}\cdot\text{min}^{-1}$ respectively. The experimental results show that eucalyptus pyrolysis process can be divided into 3 stages: moisture volatilizes stage, volatility analysis phase and carbonization stage. And with the increasing of the heating rate, the maximum weight loss rate increased. the initial pyrolysis temperature, the termination of pyrolysis temperature and the maximum peak temperature of the pyrolysis curves slightly moved to the high temperature areas. The pyrolysis product was analyzed by using the FTIR spectra. What's more, it can verify its corresponding TG-DTG curve. The experiment aims to study the biomass which cause material agglomerate, furnace coke, fouling and equipment corrosion in the process of burning, so that it can provide theoretical support.

Introduction

Biomass is a renewable , potential of sustainable and relative environmentally friendly clean energy. We intensify the efforts on the development and utilization of renewable biomass in China[1-5]. At present, the domestic and foreign researchers have made a lot of research on kinetics and the character of volatile product of biomass, and achieve a certain progress and results. Sharma et al. studied the behavior of rice husk in the state of pellet and powder. The kinetic parameters were determined. Wangshuang et al. used the TG-FTIR hyphenated techniques to study the pyrogenation process and kinetics of marine algae gracilaria. They calculated the pyrogenation product release index and obtained the kinetic compensation effect between activation energy E and frequency factor A[6-8].

This experiment selects eucalyptus as experimental samples and studies biomass's pyrogenation kinetics and the features of volatile product on account of the heating rate variable. This study will provide theoretical basis for the problems of bed material deposited poly group, furnace slagging and equipment corrosion during biomass were burning.

Experimental

Experimental apparatus and sample

EA3000 element analyzer, Perkins Elmer Pyris STA6000 thermogravimetric analyzer and Spectrum-1 Fourier transformation infrared Spectrum analyzer were used in the current work. Chose eucalyptus which come from Guangdong Zhanjiang biomass power plants as the sample. The industrial analysis and elemental analysis of eucalyptus were listed in table 1. We made the sample's particle size in 0.08-0.10mm and loaded 10mg each time. Then the carrier gas flow rate is $100\text{ mL}\cdot\text{min}^{-1}$. Use the concentration of 99.995% of the nitrogen gas as shielding gas. Study the pyrogenation kinetics properties at the heating rate of $10^{\circ}\text{C}\cdot\text{min}^{-1}$ 、 $30^{\circ}\text{C}\cdot\text{min}^{-1}$ 、 $60^{\circ}\text{C}\cdot\text{min}^{-1}$ respectively.

Table 1 The industrial analysis and elemental analysis of eucalyptus

Eucalyptus	Industry analysis (%)				Elemental analysis (%)				
	Water	Ash	Volatile	Fixed carbon	N	C	H	O	S
Percentage	11.97	19.70	53.13	15.18	0.23	45.78	5.23	34.88	13.87

Experimental methods

Took a certain amount of eucalyptus, and got biomass granule by using mini crusher for plants. Screened out particles of 0.08-0.10mm. Using analytical balance to weigh the quality of 30mg samples, and divided the samples into three averagely, called A, B, and C, respectively. Set the experimental conditions as carrier gas flow rate of $100\text{mL}\cdot\text{min}^{-1}$, atmospheric pressure state, 99.995% concentration of nitrogen as shielding gas. Set the heating rate of $10^{\circ}\text{C}\cdot\text{min}^{-1}$, $30^{\circ}\text{C}\cdot\text{min}^{-1}$ and $60^{\circ}\text{C}\cdot\text{min}^{-1}$ respectively for temperature thermogravimetric analysis. Real-time monitoring eucalyptus weightlessness rate and volatile products quantity of precipitation in the process of the pyrogenation by using Perkin Elmer Pyris STA6000 thermogravimetric analyzer and Spectrum-1 fourier transformation infrared Spectrum analyzer. Mapped Thermal Gravity Analysis curve, Differential Thermal Gravity curve and FTIR spectra under different heating rate.

Results and discussion

Thermal Gravity Analysis (TG) curve and Differential Thermal Gravity (DTG) curve

The thermal gravity analysis (TG) and differential thermal gravity (DTG) of eucalyptus under the heating rate of $10^{\circ}\text{C}\cdot\text{min}^{-1}$, $30^{\circ}\text{C}\cdot\text{min}^{-1}$ and $60^{\circ}\text{C}\cdot\text{min}^{-1}$ are shown in figure 1 and figure 2. The pyrogenation process of eucalyptus under the different heating rate are almost the same. The process are mainly divided into three obvious stages, namely: moisture evaporation stage ($0-265^{\circ}\text{C}$), volatile analysis stage ($265-605^{\circ}\text{C}$), carbonized stage ($605-700^{\circ}\text{C}$).

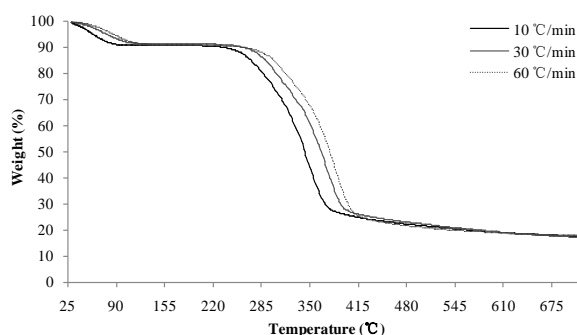


Fig.1 TG curves of eucalyptus at different heating rates

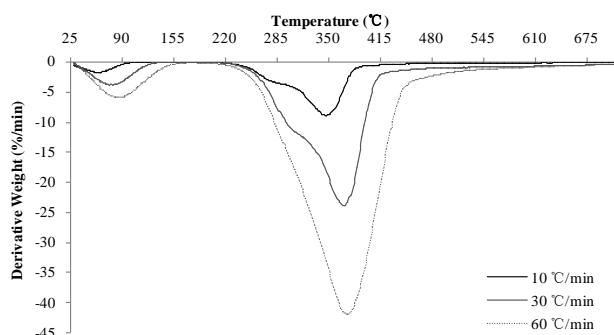


Fig.2 DTG curves of eucalyptus at different heating rates

The analysis of results of TG-DTG of eucalyptus stem

Figure 1 and figure 2 reflect the overall trend of sample in the process of pyrogenation. It can be seen from the figure 1 that the first stage is the water volatilizing. In this phase, the surface and interior free water of sample evaporate. The temperature span of when the water volatilizes is less than 265°C . The loss of weight is between 8.66% and 9.15% under three different heating rate. In this

process, the main work is to dry and preheat the sample of eucalyptus. With the increase of temperature ($>265^{\circ}\text{C}$), volatile begin to precipitate and burning. The sample lose weight quickly. When the temperature span is $265\text{--}605^{\circ}\text{C}$, the loss of weight is between 68.23% to 69.16%. At this point, the loss of weight span in this stage is wider than that of other two stages. The above phenomenon is due to the mainly cellulose, hemicelluloses and part of lignin in eucalyptus decompose at this stage. At the same time, a series of complex and continuous parallel thermal chemical reaction appear in this stage. The phase is known as volatile analysis stage. It is the most important stage in the whole process of pyrogenation[9-12]. When the temperature is higher than 605°C , the loss of weight rate decline gradually until the leveling off. The terminate temperature is 700°C . This phase is known as coking stage. With the increase of heating rate, time to reach the terminate temperature is shorter gradually. Final residual amount has a small gap under different heating rate.

It can seen from the curve of DTG shown in figure 2 that, in the water evapotating stage, the heating rate is $-1.80\%\cdot\text{min}^{-1}$, $-3.85\%\cdot\text{min}^{-1}$ and $-5.96\%\cdot\text{min}^{-1}$ respectively under the maximum loss of weight rate in $10^{\circ}\text{C}\cdot\text{min}^{-1}$, $30^{\circ}\text{C}\cdot\text{min}^{-1}$ and $60^{\circ}\text{C}\cdot\text{min}^{-1}$ respectively. In the precipitate stage of volatile products, the heating rate is $-8.90\%\cdot\text{min}^{-1}$, $-23.95\%\cdot\text{min}^{-1}$ and $-41.89\%\cdot\text{min}^{-1}$ respectively under the maximum loss of weight rate in $10^{\circ}\text{C}\cdot\text{min}^{-1}$, $30^{\circ}\text{C}\cdot\text{min}^{-1}$ and $60^{\circ}\text{C}\cdot\text{min}^{-1}$ respectively. There is a shoulder peak which represents the decomposition of hemicelluloses under 301.20°C and the maximum peak which represents the decomposition of cellulose under 346.83°C at the heating rate of $10^{\circ}\text{C}\cdot\text{min}^{-1}$. After 580°C , the loss of weight rate decline gradually corresponds to the decomposition of lignin or coke, and much coke are left. However, the shoulder peak which represents the decomposition of hemicelluloses become insignificant gradually under the heating rate of $30^{\circ}\text{C}\cdot\text{min}^{-1}$ with the improvement of heating rate. When the heating rate is $60^{\circ}\text{C}\cdot\text{min}^{-1}$, the shoulder peak disappear. This is mainly due to the increasing of heating rate provide more heat, and it make the heat around the sample transfer into the inside more easily. Therefore, the increasing of heating rate not only reduce the time that the sample achieve the ash volatile stage, but also increase the exterior temperature difference, which make the pyrogenation gas of outer layer cannot spread in time and aggravate thermal hysteresis phenomenon[13].

The analysis of thermal conversion products precipitating based on FTIR

When the temperature is 10°C , 30°C and 60°C respectively, the characteristic peaks of H_2O , CO_2 , CO , CH_4 and some oxygen compounds in the thermal conversion process are shown in figure 4 to figure 6[14-17]. A continuous low peak occur when the wavenumber is in the rage of 3500cm^{-1} to 3950cm^{-1} . It means that the O-H keys in the water vapor molecules stretching vibrating in the way of symmetry and asymmetric. The weight loss process of this functional groups in the first stage ($0\text{--}265^{\circ}\text{C}$) is the same as that in the moisture evaporation stage shown in the curve of TG-DTG. In addition, the unimodal at the wavenumber of 670cm^{-1} occurs in the whole process of pyrogenation. The main reason is there is decarboxylation of eucalyptus generating CO_2 . For the strong absorption band (wavenumber ranged from 1000cm^{-1} to 1800cm^{-1}), it mainly involves spirituous C-H-O keys of saturated carbon absorption (wavenumber ranged from 1030cm^{-1} to 1100cm^{-1}), C-O keys which phenolic hydroxyl and oxygen stretching vibrating absorption peak (wavenumber ranged from 1185cm^{-1} to 1240cm^{-1}) and C=O keys which carboxylic acids or carboxylic compounds (such as aldehydes, ketones and esters) stretching vibrating absorption peak (wavenumber ranged from 1580cm^{-1} to 1800cm^{-1}). As a result, the wave peaks within the wavenumber above represent absorption band and characteristic peak which caused by macromolecules functional groups such as aldehydes, ketones, carboxylic acid, phenol and alcohol. The twin peak in the rage of 2250cm^{-1} to 2021cm^{-1} in the figure is very clear. This is caused by C-O absorption peak of CO which produced by incompleting of macromolecular organic compounds in the process of pyrogenation. Some absorption band caused by small molecular alkyl groups appear in the rage of 2620cm^{-1} to 3120cm^{-1} . For example, CH_3^- , CH_2^- and CH^- which stretching vibrating in the way of symmetric and anti-symmetric. The small molecular compounds such as acetic, formic acid, small molecular

alkanes, olefin and alkyne in this absorption band[18]. When the temperature is higher than 360°C, there is a clear absorption peak at the wavenumber of 3014cm⁻¹. The peak in this place represents the break of macromolecular keys and reconstruction of different organic functional groups in the process of pyrogenation.

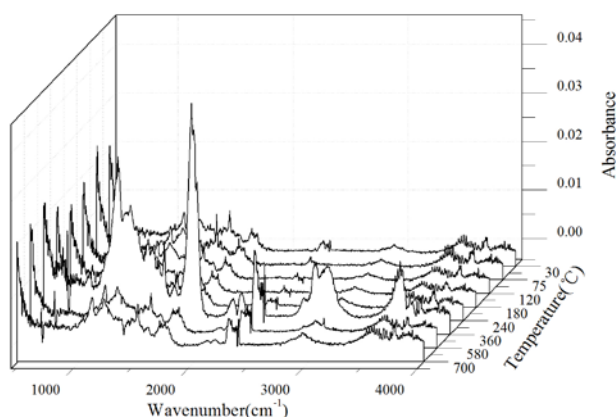


Fig.4 The FTIR spectra of eucalyptus volatile products at $\beta=10^{\circ}\text{C}\cdot\text{min}^{-1}$

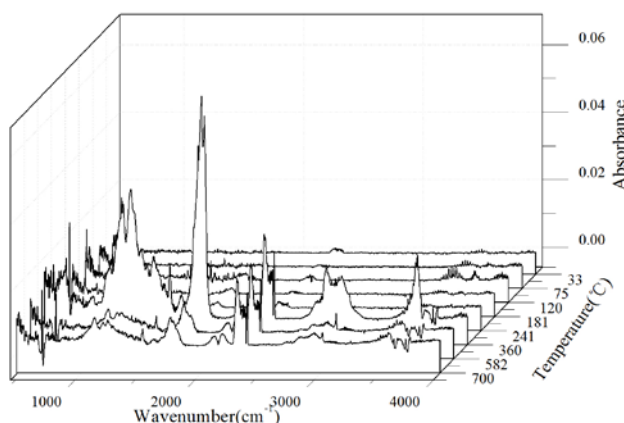


Fig.5 The FTIR spectra of eucalyptus volatile products at $\beta=30^{\circ}\text{C}\cdot\text{min}^{-1}$

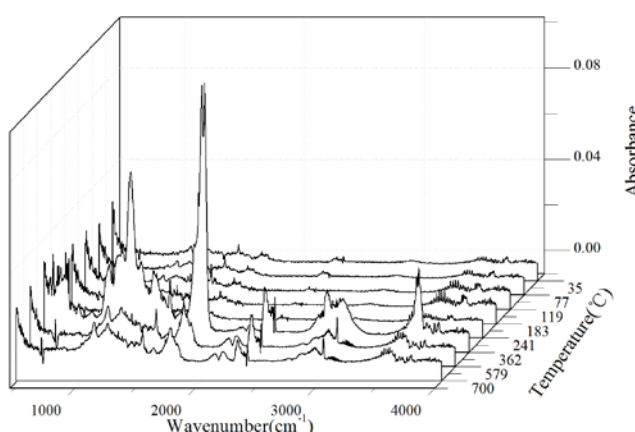


Fig.6 The FTIR spectra of eucalyptus volatile products at $\beta=60^{\circ}\text{C}\cdot\text{min}^{-1}$

The research on slagging mechanism based on the analysis of volatile products of eucalyptus

In moisture volatilizes stage, the free water in eucalyptus will evaporate with the rising of temperature. The samples of eucalyptus become very dry. The dry samples absorb heat continuously. When the temperature reaches the rage of 110°C to 265°C, volatile gas in the surface of eucalyptus is further precipitated and the original structure of eucalyptus begin to be destroyed. Then eucalyptus

becomes fluffy. When the temperature is higher than 265°C, saturated carbon alcohols, saturated esters, saturated aldehydes, saturated ketones, saturated hydrocarbon begin to burning and produce heat. Part of heat transfer into the atmosphere. Another part of heat spread to the interior of eucalyptus and make inner volatile being precipitated further. Volatile cocoon the rest of the coke and cut off the contact between coke and oxygen. Coke start to contact with oxygen slowly with volatile combusting and reducing. There is a lot of ash in the process of coke burning, which make the fuel to be cocooned. It prevent coke burning continuously. This causes large numbers of slagging phenomenon and leads to low efficiency or shutdown of furnace. According to the characteristic of volatile of eucalyptus produced in the process of pyrolysis, the slagging mechanism is explored. It provides the basis for optimizing the corresponding combustion equipments and process design.

Summary

(1)The experiment of pyrogenation dynamics analysis showed that the loss of weight progress was divided into moisture bolatilizes stage, volatile precipitating stage and carbonization stage. The main reaction stage mainly concentrated in the volatile precipitating stage. The largest loss of weight increased with the increasing of heating rate. The pyrogenation curves of main reaction moved to high temperature shown in the curve of TG. The maximum peak temperature of the maximum heating rate moved to high temperature slightly shown in the curve of DTG.

(2)The FTIR spectra showed stretching the vibration characteristic peak and absorption peak of O-H, C=O, C-O-H, H-O-C=O and small molecular alkyl groups in different wavenumbers. The characteristic peak and absorption band of every kind of volatile were accordance with the curve of FG-DTG. The test verified the products in each pyrogenation stage.

(3)Analyzing the characteristic of volatile products by using TG-DTG-FTIR method was helpful to study the slagging mechanism in three stages. It achieved the purpose of optimizing the existing combustion equipments and parameters of the process gradually.

References

- [1] Shi Changdong, Zhang Rui, Che Deyong, Jiajia, in: Research on pyrolysis characteristics about different types of biomass. (2012)
- [2] Zhan Huilong, Yan Changyu, Yang Zhao, in: Research on the development of Chinese agricultural biomass industry. (2010)
- [3] Zhao Jun, in: The utilization of biomass energy resources in our country. (2008)
- [4] Wang Jiuchen, in: Current situation of the development trend analysis about Chinese Biomass Industry. (2007)
- [5] Christian Ahl, in: Biomass energy in a small-scale region of a developed country — the case of the district of Goettingen. (2000)
- [6] Michal Tou, in: *Effective biomass integration into existing combustion plant*. (2011)
- [7] Su Qiong, in: *Pyrolysis influencing factors about cellulose biomass*. (2007)
- [8] Klopogge J T, Ruan H D, Frost R L, in: *Thermal decomposition of bauxite minerals: infrared emission spectroscopy of gibbsite, boehmite and diaspor*. (2002)
- [9] Kirtania K, Bhattacharya S, in: *Application of the distributed activation energy model to the kinetic study of pyrolysis of the fresh water algae Chlorococcum humicola*. (2012)
- [10] Yue Maozhen, Wang Yongzheng, Bian Sufang, Tian Sule, Lu Chen, in: *Biomass and coal combustion in the process of corrosion and its prevention measures*. (2012)
- [11] Wang Shuang, Jiang Xiumin, in: *The test and mechanism research of algae biomass pyrolysis and combustion*. (2010)
- [12] Lai Yanhua, Lv Mingxin, Ma Chunyuan, Shi Mingheng, in: *Research on pyrolysis characteristics and kinetics about the straw raw material*. (2002)
- [13] We Wei, Huang Fang, Yu Chunjiang, Fang Mengxiang, in: *Biomass combustion equipment around high temperature corrosion problems*. (2011)

- [14] Bojan Janković, Ivana Smičiklas, Jasna Stajić-Trošić, Dušan Antonobić, in: *Thermal characterization and kinetic analysis of non-isothermal decomposition process of Bauxite red mud. Estimation of density distribution function of the apparent activation energy.* (2013)
- [15] Sun Ying, Wang Yongzheng, Su Xiujuan, in: *Research on biomass combustion, slagging and sulphuric acid corrosion features.* (2011)
- [16] M. Varol, A.T. Atımtay, B. Bay, H. Olgun, in: *Investigation of co-combustion characteristics of low quality lignite coals and biomass with thermogravimetric analysis.* (2010)
- [17] Si Yaohui, in: *Agricultural straw combustion characteristic and dynamics analysis.* (2012)