

Infrastructure Communication Reliability for WSN on Sink-manycast and Sink-anycast Model *

Chunyu Miao¹, Lina Chen²

¹Xingzhi College, Zhejiang Normal University, Jinhua, China

²Mathematics, Physics and Information Engineering College, Zhejiang Normal University, Jinhua, China
netmcy@zjnu.cn, chenlina@zjnu.cn

Abstract - We consider the problem of the infrastructure communication reliability (ICR) of wireless sensor networks (WSN) on sink-manycast and sink-anycast model. We formulate ICR metrics for WSN with hierarchical clustered topology base on an reduced ordered binary decision diagrams (ROBDD) approach. Furthermore, we give the case study of the metrics application of WSN with hierarchical clustered topology. Based on the reliability metrics, we will optimize the structure of WSN to achieve the optimal network reliability.

Index Terms - Wireless sensor network, Infrastructure communication reliability, Sink-manycast, Sink-anycast.

I. Introduction

A WSN consists of a large number of sensor nodes and a base station. The sensor nodes are designed to collect data from the environment. The base station is an aggregation node for collecting data and it can also performs as an interface between the WSN and other networks or human operators. The communication within WSN can be conceptually classified into two categories: application communication and infrastructure communication [1], [2]. Application communication relates to the transfer of sensed data collected from the physical environment. Infrastructure communication relates to the delivery of configuration and maintenance messages (e.g. network set-up, query, path discovery, processing tool, operating system, and policies). The reliable data delivery in both paradigms must be guaranteed. Refer [3] for studies on the reliability analysis of WSN under the application communication paradigm. This work only addresses the infrastructure communication reliability (ICR) of WSN.

Presently, star, tree, mesh, and hierarchical clustered topologies have emerged as the topology choices for WSN. Each topology has its own pros and cons in terms of communication efficiency, complexity in routing protocol design, and overhead to setup and maintain the topology with the presence of node failure and possible mobility [4]. hierarchical clustered topologies is very popular in WSN application, so in the section 3, we formulates ICR metrics for WSN with hierarchical clustered topology. We also give the case study in the section 4.

II. Problem Statement

For the infrastructure communication for WSN with

hierarchical clustered architecture, three different data delivery models have been considered for the WSN reliability analysis in [5]. They are: 1) sink unicast where the base station sends control messages to a single sensor, 2) sink multicast where the base station sends control messages to a group of sensors, 3) sink broadcast where the base station sends control messages to all sensors. In this work, we consider two new data delivery models for WSN, namely sink manycast and sink anycast. In the sink manycast model, the base station sends control messages to a subset of sensors out of a large group of qualified sensors. For example, when there are n qualified sensors, the control message is expected to be received by any m out of n sensors. As a special case of sink manycast, sink anycast requires the base station to send control messages to any one out of a group of qualified sensors (i.e., $m = 1$) [6, 7]. To the best of our knowledge, no work has been done to address the infrastructure communication reliability (ICR) of WSN under the sink manycast and anycast models. This section proposes new reliability metrics for the manycast and anycast ICR analysis in WSN with hierarchical clustered architecture.

In the hierarchical clustered topology, sensors are organized into clusters with cluster heads (CH), and low-level cluster heads form high-level clusters. Communications within a cluster and between cluster heads are based on multi-hop mesh routing [8]. Figure 1 illustrates a small example of WSN with hierarchical clustered topology. Note that level 0 is the lowest level in the hierarchy.

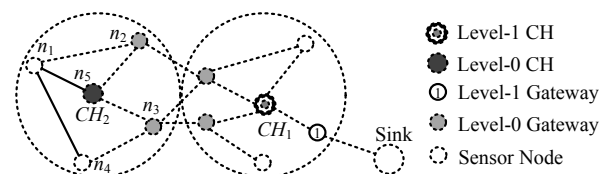


Figure 1 An example of WSN.

III. Reliability Model

The progressive reduction method proposed in [9] can greatly reduce the complexity of reliability analysis in WSN. A level- i graph can be reduced to a graph containing only the level- i CHs and level- i inter-cluster gateways. Here, inter-

* This work is supported by research project of Zhejiang Normal University Xingzhi college(No. 23) And Opening Fund of Top Key Discipline of Computer Software and Theory in Zhejiang Provincial Colleges at Zhejiang Normal University(No. ZSDZZZZXK21).

cluster gateways are the nodes that are connected to the nodes in the neighboring clusters within one hop. With this reduction, it is sufficient to analyze only the clusters/sub-networks for reliability, instead of the entire network.

The level- i graph is modeled by an undirected probabilistic graph $G(i)$ (V, E), where V is the set of vertices (sensor nodes) and E is the set of edges (links). Let $CH(k)$ denote the level- k cluster heads, and $g(k)$ denote the gateway nodes connecting two neighboring level- k clusters. The progressive reduction scheme starts from $G(0)$ (V, E), $G(i)$ (V, E) is reduced to $G(i+1)$ (V, E) which contains only $CH(i)$ and $g(j)$ where $j \geq i$ and the two-terminal reliabilities between $CH(i)$ and $g(i)$ are computed from $G(i)$ (V, E) and assigned as reliability of the corresponding CH to gateway link at $G(i+1)$ (V, E). This reduction scheme is iterated until the top level of the hierarchy is reached.

Reliability is generally defined as “the probability that the system will perform its intended function under stated conditions for a specified period of time” [10]. In particular, the infrastructure communication reliability (ICR) of WSN is the probability that there exists an operational path from the sink node to the required nodes.

A. Sink Anycast

The ICR in this scenario is the probability that there exists an operational path from the sink node to at least one sensor node out of a group of qualified nodes. For hierarchical clustered topology, the ICR is the probability that there exists an operational path from the sink node to top hierarchical level CH, then to the next hierarchical level CH and so on to the destination group’s CH and finally to any sensor node in that group. Note that the qualified sensor nodes in the group may not belong to a single cluster. Let Q denote the set of qualified nodes, a denote any sensor node in Q , and h_k denote the CH that is hierarchically above a at parent level k , $0 \leq k \leq t$. Then the ICR of WSN with hierarchical clustered topology for sink anycast can be formulated as equation 1.

$$ICR_{anycast} = \Pr \left\{ \bigcup_{\forall a \in Q} \left[E_2(\text{sink to } CH^{(t)}_{h_t}) \cap E_2(CH^{(t)}_{h_t} \text{ to } CH^{(t-1)}_{h_{t-1}}) \cap \dots \cap E_2(CH^{(1)}_{h_1} \text{ to } CH^{(0)}_{h_0}) \cap E_2(CH^{(0)}_{h_0} \text{ to } a) \right] \right\} \quad (1)$$

where E_2 represents the event that there exists an operational communication path between a given pair of nodes. Thus, $\Pr(E_2)$ can be evaluated as two-terminal reliability.

Consider the special case in which all the qualified sensor nodes belong to a single cluster r . The ICR of WSN for this special case can be formulated as equation 2.

$$ICR_{anycast-r} = \Pr \left\{ \begin{aligned} & E_2(\text{sink to } CH^{(t)}_{h_t}) \cap E_2(CH^{(t)}_{h_t} \text{ to } CH^{(t-1)}_{h_{t-1}}) \cap \dots \cap \\ & E_2(CH^{(1)}_{h_1} \text{ to } CH^{(0)}_{h_0}) \cap \left[\bigcup_{\forall a \in Q} E_2(CH^{(0)}_{h_0} \text{ to } a) \right] \end{aligned} \right\} \quad (2)$$

B. Sink Multicast

The multicast-based ICR is the probability that there exists an operational path from the sink node to at least one subset of sensor nodes out of a larger group of qualified sensor nodes. For hierarchical clustered topology, the multicast-based ICR is the probability that there exists an operational path from the sink node to top hierarchical level CH, then to the next hierarchical level CH and so on to the destination group’s CH and finally to all sensor nodes in any one subset. Note that the qualified sensor nodes in the group may not belong to a single cluster. Let R_x denote a subset of qualified nodes, n denote any sensor node in R_x , n denote the number of sensor nodes in the qualified group, m denote the required number of sensor nodes in each subset, $H_{0,x}$ denote the set of $CH(0)$ for nodes in R_x , and $H_{l,x}$ denote the set of CH that is hierarchically above R_x at parent level l , $0 \leq l \leq t$. Then the ICR of WSN with hierarchical clustered topology for sink multicast can be formulated as equation 3.

$$ICR_{multicast} = \Pr \left\{ \bigcup_{x=1}^{C_n^m} \left[\bigcap_{\forall i \in H_{t,x}} E_2(\text{sink to } CH^{(t)}_{h_t}) \cap \left[\bigcap_{\forall j \in H_{t-1,x}} E_2(CH^{(t)}_{h_t} \text{ to } CH^{(t-1)}_{h_{t-1}}) \right] \right] \right\} \quad (3)$$

Consider the special case in which all the qualified sensor nodes belong to a single cluster r . Let h_l be the parent CH of cluster r at the level l . The ICR of WSN for this special case can be formulated as equation 4.

$$ICR_{multicast-r} = \Pr \left\{ \begin{aligned} & E_2(\text{sink to } CH^{(t)}_{h_t}) \cap E_2(CH^{(t)}_{h_t} \text{ to } CH^{(t-1)}_{h_{t-1}}) \cap \dots \cap \\ & E_2(CH^{(1)}_{h_1} \text{ to } CH^{(0)}_{h_0}) \cap \left\{ \bigcup_{x=1}^{C_n^m} \left[\bigcap_{\forall a \in R_x} E_2(CH^{(0)}_{h_0} \text{ to } a) \right] \right\} \end{aligned} \right\} \quad (4)$$

Note that the ICR expressions (1), (2), (3), and (4) can be simplified to obtain tight approximations. For example, (4) can be tightly lower-bounded by (5). This is an efficient simplification because storing and manipulating symbolic expressions are very computationally intensive. This simplification is also realistic under the practical assumption that the clusters are non-overlapping, and nodes that participate in communication between $CH(k)$ and $CH(k+1)$ do not generally participate in communication between $CH(k)$ and $CH(k-1)$, and when they do participate, their contribution is insignificant. That is all the sub-events are disjoint provided that we account for each CH reliability only once along any operational path.

$$ICR_{multicast-r} = \Pr_2(\text{sink to } CH^{(t)}_{h_t}) \times \Pr_2(CH^{(t)}_{h_t} \text{ to } CH^{(t-1)}_{h_{t-1}}) \times \dots \times \Pr_2(CH^{(1)}_{h_1} \text{ to } CH^{(0)}_{h_0}) \times \Pr \left\{ \bigcup_{x=1}^{C_n^m} \left[\bigcap_{\forall a \in R_x} E_2(CH^{(0)}_{h_0} \text{ to } a) \right] \right\} \quad (5)$$

Similar simplified lower bound expressions can also be obtained for (1), (2) and (3) which are not shown here due to the space limitation.

IV . Case Study

The proposed metrics are illustrated via the analysis of the example WSN with two clusters in Figure 1, where CH1 and CH2 are CH(0) of cluster 1 and cluster 2 respectively, and CH1 is the CH(1) of the two clusters. In this example, links and nodes are assumed to fail *s*-independently. The fixed failure rates of $2e-6$ hr⁻¹, $5e-7$ hr⁻¹, and $1e-6$ hr⁻¹ are assigned to the links, base station (sink node), and sensor nodes (including both cluster heads and gateway nodes), respectively. Note that our analysis methodology has no limitation on the type of failure distributions. For simplification of illustration, we assume all qualified sensor nodes are in the same cluster 2. In other words, the set of all qualified sensor nodes *Q* belongs to $\{n1, n2, n3, n4, n5\}$. After applying progressive reduction scheme, $G(0)(V, E)$ in Figure 1 is reduced to $G(1)(V, E)$ containing only CH(0), $g(0)$ and $g(1)$ as shown in Figure 2(a). $G(1)(V, E)$ is further reduced to obtain $G(2)(V, E)$ composed of only CH(1) and $g(1)$ between level 1 cluster and the sink as shown in Figure 2(b).

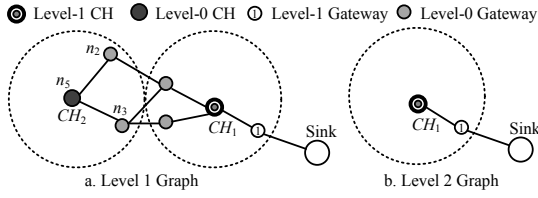


Figure 2 Graphs after reduction.

In this section, we study ICR of the example WSN for both anycast and multicast data delivery models.

A . Sink Anycast

Since all qualified nodes are in cluster 2, equation 2 is used to evaluate the anycast-based ICR of the example WSN. We consider four cases with different qualified sensor nodes groups: 1) Q1 = {n1} (unicast), 2) Q2 = {n1, n2}, 3) Q3 = {n1, n2, n3}, 4) Q4 = {n1, n2, n3, n4}.

As an example, for the case Q2 = {n1, n2}, equation 2 can be rewritten as equation 6.

$$ICR_{anycast-2} = \Pr \left\{ \begin{aligned} &E_2(\text{sink to } CH_1) \cap E_2(CH_1 \text{ to } CH_2) \\ &\cap [E_2(CH_2 \text{ to } n_1) \cup E_2(CH_2 \text{ to } n_2)] \end{aligned} \right\} \quad (6)$$

The above reliability expression can be computed directly from the graphs in Figure 1 and Figure 2. In particular, the last two terms in equation 6 are obtained from Figure 1, Figure 2(a) is analyzed to obtain the second term $E_2(CH_1 \text{ to } CH_2)$, Figure 2(b) is used to evaluate the first term $E_2(\text{sink to } CH_1)$.

If a component's failure probability has been considered at a lower-level graph, it is considered zero in higher-level graphs. For example, since the failure probabilities of CH2 and the gateway node in cluster 2 $g_2(0)$ (n_2) are already considered when evaluating the last term, failure probability of zero is assigned to CH2 and n_2 in $G(1)(V, E)$ to evaluate $\Pr_2(CH_1 \text{ to } CH_2)$. However, the inter cluster gateway-to-gateway link ($g_1(0)$, $g_2(0)$) failure probability needs to be considered at

$G(1)(V, E)$.

Q1 is a special case of anycast where the data delivery model is actually sink unicast and the evaluation expression is equation 7.

$$ICR_{unicast} = \Pr \{ E_2(\text{sink to } CH_1) \cap E_2(CH_1 \text{ to } CH_2) \cap E_2(CH_2 \text{ to } n_1) \} \quad (7)$$

The reliability expressions for the other two cases Q3 and Q4 can be similarly derived from equation 2. The reliability results for the four cases are given in Figure 3.

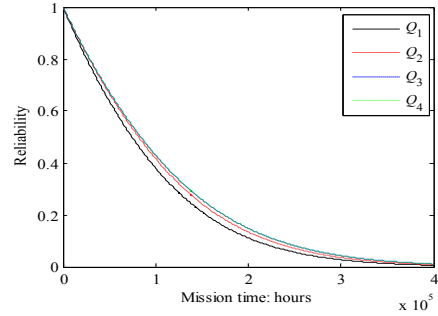


Figure 3 Reliability results for sink anycast-based WSN

Note that the results under cases Q3 and Q4 are exactly the same. The reason is that all the paths between CH2 and n_4 have to pass through n_1 , n_2 , or n_3 . In other words, there is an operational path between CH2 and n_4 only when there is an operational path between CH2 and n_1 , between CH2 and n_2 , or between CH2 and n_3 . In this case, adding n_4 to the group of qualified sensor nodes has no effect on the ICR of WSN. However, as shown in Figure 3 the reliability of WSN increases as the number of sensor nodes in the qualified group increases for other cases. In general, WSN using sink anycast data delivery model is more reliable than WSN using sink unicast because sink anycast provides more flexibility than sink unicast. For this example system at the mission time of 200,000 hours, the reliability of anycast under the case Q3 is 10.53% better than that of anycase under the case Q2, which is 20.17% better than that of unicast under the case Q1.

B . Sink Multicast

Since all qualified nodes are in cluster 2, Equation 4 is used to evaluate the ICR of WSN for multicast data delivery model.

Assume the required number of sensor nodes in each subset is 2, i.e., $m = 2$. We consider two cases for the qualified sensor nodes: Q1 = {n1, n2} and Q2 = {n1, n2, n3}. For the case Q2, $n = 3$. Thus, there are combinations: 1) R1 = {n1, n2}, 2) R2 = {n1, n3}, 3) R3 = {n2, n3}.

Simplification technique in Section 2 is used to obtain the lower-bound for the case Q2. Equation 5 can be rewritten as equation 8.

$$ICR_{multicast-2} = \Pr_2(\text{sink to } CH_1) \times \Pr_2(CH_1 \text{ to } CH_2) \times \Pr \left\{ \begin{aligned} &[E_2(CH_2 \text{ to } n_1) \cap E_2(CH_2 \text{ to } n_2)] \\ &\cup [E_2(CH_2 \text{ to } n_1) \cap E_2(CH_2 \text{ to } n_3)] \\ &\cup [E_2(CH_2 \text{ to } n_2) \cap E_2(CH_2 \text{ to } n_3)] \end{aligned} \right\} \quad (8)$$

Q1 is a special case of multicast where there are only two sensor nodes, n_1 and n_2 . In this scenario, the data delivery model is actually sink multicast and the evaluation expression is equation 9.

$$ICR_{multicast-2} = P_{\mathcal{D}}(\text{sink to } CH_1) \times P_{\mathcal{D}}(CH_1 \text{ to } CH_2) \times P_{\mathcal{E}}[E_2(CH_2 \text{ to } n_1) \cap E_2(CH_2 \text{ to } n_2)] \quad (9)$$

Note that broadcast is a special case of multicast where the group includes all 11 nodes of the WSN in Figure 1. The comparison results for broadcast, multicast, and multicast are shown in Figure 4.

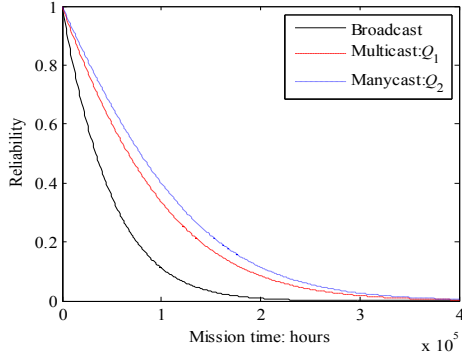


Figure 4 Comparison results for broadcast, multicast, and multicast.

From Figure 4, we can see that for a given number of sensor nodes of each subset, reliability increases as the size of the qualified group increases. In general, WSN based on sink multicast data delivery model is more reliable than WSN based on sink multicast because sink multicast provides more flexibility than sink multicast. For this example system at the mission time of 200,000 hours, the reliability of multicast under the case Q2 is 34.97% better than that of multicast under the case Q1, which is 862.02% better than that of the broadcast case.

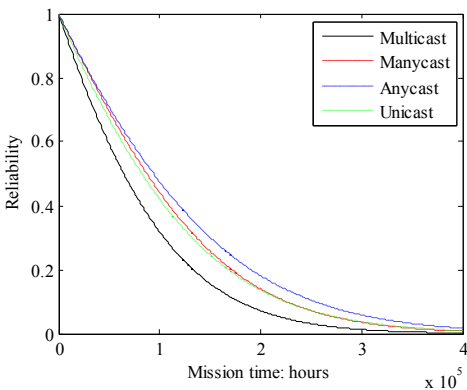


Figure 5 Comparison results for different data delivery models.

Given $Q = \{n_1, n_2, n_3\}$, the reliability results for WSN with sink anycast, multicast (with $m=2$) and multicast are compared in Figure 5. For unicast, n_1 is the destination sensor node. Because sink multicast requires more than one node

connected with the sink node, WSN with multicast data delivery model is less reliable than WSN with anycast data delivery model for a given qualified group.

V. Conclusions and Future Work

Reliability models were proposed for the infrastructure communication reliability analysis of WSN with hierarchical clustered topology. Different data delivery models are compared through illustrative examples: WSN with anycast is the most reliable and WSN with broadcast is the least reliable. The proposed models have no limitation on the type of component failure distributions. The models can be adapted to other topologies.

In the future, we will study and compare the ICR for different biconnected graphs for the mesh topology with different node degrees and average path lengths. Based on the reliability metrics, we will optimize the structure of WSN to achieve the optimal network reliability.

Acknowledgement

This work is supported by research project of Zhejiang Normal University Xingzhi college(No. 23) And Opening Fund of Top Key Discipline of Computer Software and Theory in Zhejiang Provincial Colleges at Zhejiang Normal University.

References

- [1] S. Tilak, N. B. A. Ghazaleh, and W. Heinzelman, "A taxonomy of wireless micro-sensor network models," *Mobile Computing and Communications Review*, vol. 1, pp. 28-36, June 2002.
- [2] A. Shrestha, L. Xing, Y. Sun, and V. Vokkarane, "Infrastructure communication reliability of wireless sensor networks considering common-cause failures," *International Journal of Performability Engineering*, in press.
- [3] X. Zhang, D. Wang, H. Sun, and K. S. Trivedi, "A BDD-based algorithm for analysis of multistate systems with multistate components," *IEEE Transactions on Computers*, vol. 52, no. 12, pp. 1608-1618, December 2003.
- [4] A. Shrestha and L. Xing, "Quantifying application communication reliability of wireless sensor networks," *International Journal of Performability Engineering, Special Issue on Reliability and Quality in Design*, vol. 4, pp. 43-46, 2008. (no)
- [5] X. Zhu and H. Gupta, "Fault-tolerant multicast to mobile destinations in sensor networks," *Proceedings of IEEE International Conference on Communications, Glasgow Scotland*, pp. 3596-3603, June 2007.
- [6] M. Wu, T. Yang, and H. Zhang, "A data-centre fast rerouting base on anycast routing in wireless self-organized sensor networks," *Proceeding of the 2006 IEEE, International Conference on Mechaatronics and Automation, Luoyang, China, June 2006*.
- [7] L. Xing and A. Shrestha, "QoS reliability of hierarchical clustered wireless sensor networks," *Proceedings of The 25th IEEE International Performance Computing and Computing and Communications Conference (eSCO-Wi'06)*, Phoenix, Arizona, pp. 641-646, April 2006.
- [8] M. Rausand and A. Hoyland, *System Reliability Theory: Models, Statistical Methods, and Applications (2nd Edition)*, John Wiley & Sons, Inc, New Jersey, 2004.
- [9] C. Carter, S. Yi, P. Ratanchandani, and R. Kravets. "Multicast: exploring the space between anycast and multicast in ad hoc networks," *Proceeding of the International Conference on Mobile Computing and Networking*, pp. 273-285, 2003. (no ACM)
- [10] L. Xing, A. Shrestha, "DNA: a tool for network reliability and sensitivity analysis," *The Fourth International Conference on Quality and Reliability (ICQR4)*, Beijing, China, August 2005 (no).